

# E-Dimming

## LED Driver

Design and Quality EASEIC of USA

# LEA115D

E-DIMMING 0/1-10V DRIVER

SPEC SHEET



200W 48V 0-3.1A 0/1-10V Dim

LEA115D

69520004




RoHS

### Features

- Universal AC input: 100-265VAC
- 3 dimming in 1: 0/1-10V , PWM signal or resistance.
- Dimming range: 0-100%
- Protections: Short Circuit ,Over current ,Over loading
- Compact form factor, Fully isolated plastic case
- Class 2 power unit
- Cooling by free air convection
- high reliability, low cost
- Suitable for dry, damp, and wet location
- 5 year warranty

### Wire Diagram

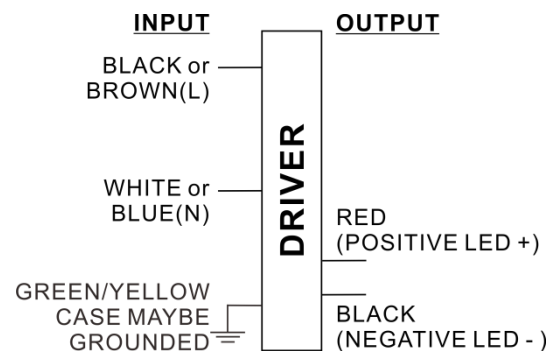

#### Note:

Install in accordance with National and Local Electrical Codes.  
Please pay special attention to wiring installation guidelines,  
Wrong wiring will cause damage to the LED driver.  
Before connection the power, make sure you have access to the  
LED load.

### Benefits

- Enables design of low profile and compact fixtures
- Helps to maximize energy savings and allows application specific light levels

# LEA115D

## E-DIMMING 0/1-10V DRIVER SPEC SHEET

### Electrical Specifications

Ordering Information			
Type	LEA115D		
Order Code	69520004		
Full product name	E-Dimming 200W 48V 0-3.1A 0/1-10V Dim		
Input Information			
Line Voltage	100-265Vac_rms		
Line Current	2.4A@115VAC	1.6A@230VAC	
Line Frequency	47-63Hz		
Min, Mains Voltage operational	100[min]		
Max, Mains Voltage operational	265[max]		
THD(total)	<25%		
Power Factor(PF)	≥90% at full load		
Efficiency (Typ.@265VAC)	≥88% at full load		
Inrush Current(Typ.)	Cold Start with full load ≤ 65A at 230VAC		
Leakage Current(Typ.)	<0.75mA/265VAC		
Output Information			
Output Constant Voltage	48V		
Output Current	0-3.1A		
Rated Power	Up to 202.2W		
Load Regulation	±5%		
Protections	Over Current ≤1.2* Iout, Over Voltage≤120% Short Circuit and Open Circuit Protection for LED+ and LED-Hiccup mode,, recovers automatically after fault condition is removed		
Ambient Temp Range	-40℃ to +80℃, 20-95% RH non-condensing		
Max Case Temperature(Tc)	75℃ for Life & 85℃ for TUV Safety		
Features			
Dimming Interface	Standard DC 0/1-10V control interface, Sink or Source <1 Ma , PWM Dimming control, Resistance value Wide dimming range from 0% up to 100% Dimming over entire input voltage range		
Approved Dimmer List(Manufacturer)	Compatible with industry standard 0/1-10V dimmers		
Dimming range	0-100%		
Weight(KG) and Size(MM)	1.6KG /256*78*47MM (L *W*H)		
Environment & Approbation			
Environmental Protection Rating	UL damp and dry		
Agency Approbations	UL8750, UL1310,UL1012,UL879,UL60950-1,CSA C22.2 No. 250.0-08 (except for 15V-54V, ), EN61347-1, EN61347-2-13 independent, IP67 approved ; TUV EN60950-1 Compliant		
Electromagnetic Compliance	Compliance to EN55015 Class A, FCC 47CFR Part 15 Class		
Harmonic Current	Compliance to EN61000-3-2 Class C		
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, Light Industry Level (surge 4KV). criteria A		


All the specifications are typical and at 25 °C Tcase unless specified otherwise

# LEA115D

## E-DIMMING 0/1-10V DRIVER SPEC SHEET

### Mechanical Specifications

### Mechanical Drawing and Dimensions

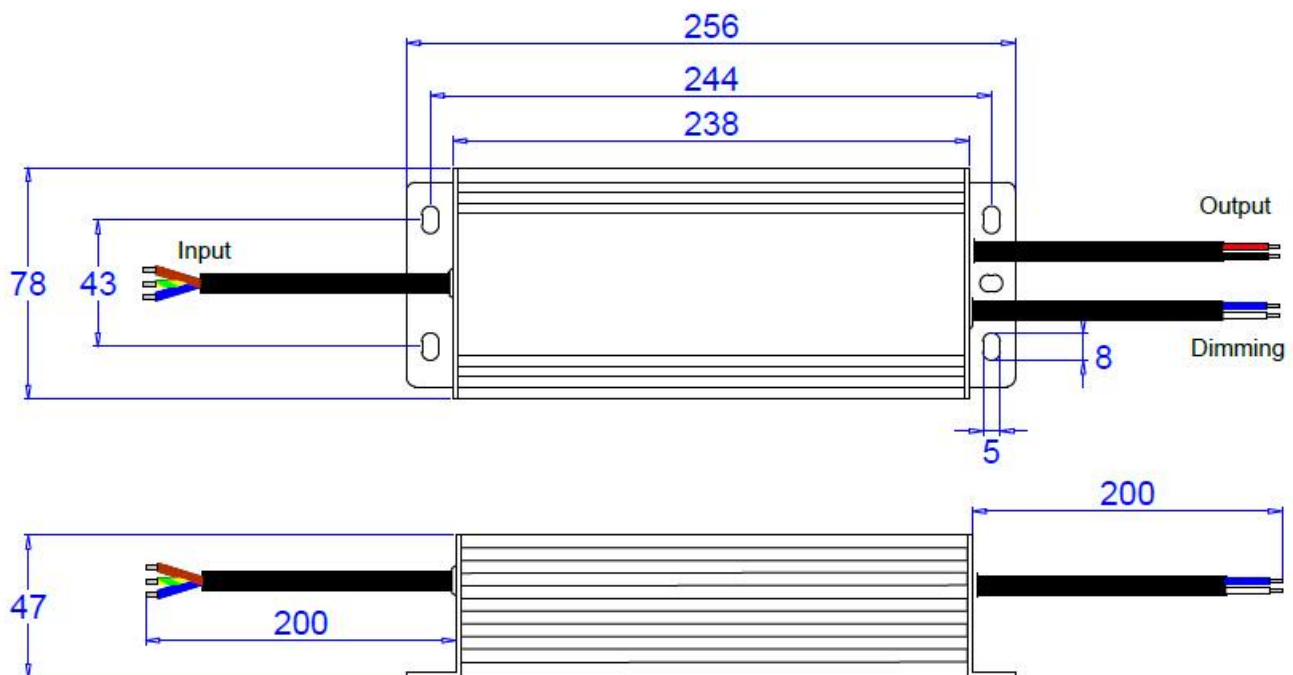

**EASEIC**

© Copyright 2013 EASEIC INC.  
All rights reserved. Rev A1.0  
Data is subject to change without notice.  
www.easeic.com

#### Easeic Inc.

27 Hall Street, Brooklyn, NY 11205  
Tel.: 1-718-243-9388  
Fax: 1-718-243-9403  
Customer Support  
Customer Care: 1-646-4029788  
E-Mail: ny@easeic.com

#### Easeic Asia Limited.

Rm. 19C, Lockhart Ctr., 301- 307  
Lockhart Rd., Wan Chai, Hong  
Kong  
Tel.: 852-6955-8075  
Fax: 852-6915-3639  
E-Mail: info@easeic.com

#### Easeic Sci-tech Co., Ltd.

No. 37 Huancun Xi Rd.,  
Liangtian Industrial Area,  
Baiyuan District, Guangzhou,  
China  
Tel.: 86-20-8230-9676  
Fax: 86-20-8230-9677  
E-Mail: sales@easeic.com